


THE STERLING SAW SHARPENER

**For Jointing, Setting and Filing
... the Teeth of a Saw ...**

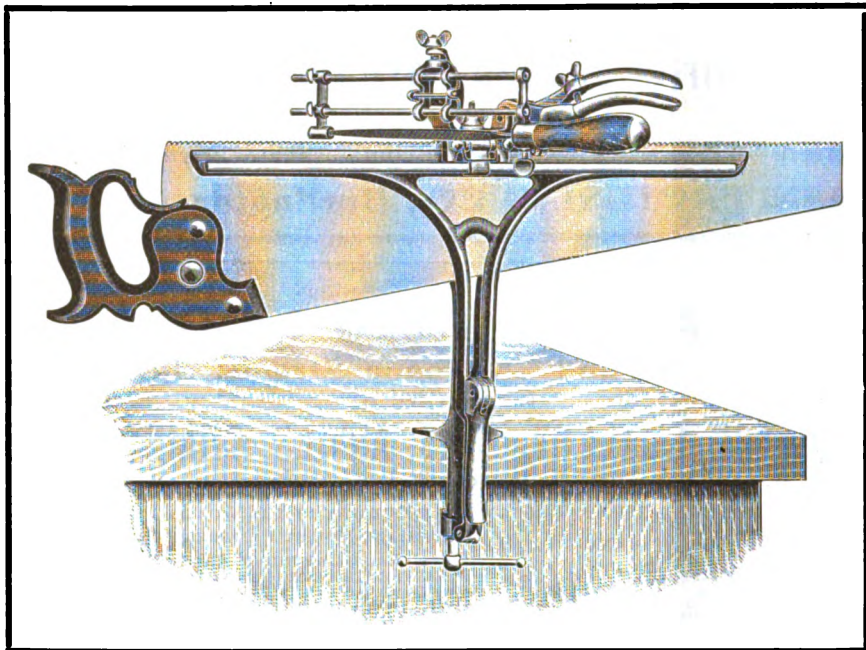

Instantly secured to a work bench or other suitable support by means of a clamp and screw. In placing the saw in the clamp ready for filing the carrier is thrown back out of the way by means of a lock which is easily raised. Our filing device is a carrier moving longitudinally on the frame resting in front on a track and held in position by the lock. On one end of the carrier is the filing frame with indicator which gives depth of tooth desired as well as the angle for filing. On the upper face of the carrier block is a protractor with a scale which indicates the angle required, all being held firmly in one place when adjusted by a thumb-screw.

On the end of the carrier opposite the saw frame is the setting device which consists of levers having dies to correspond with the number of teeth in the saw it is intended to file. This will set from two to twelve teeth at one operation as desired.

In the jointing attachment, the new features of which there are many, we claim superiority over all others. Under the carrier is a recess for a flat file which may be slipped in from either side and is held in place by means of set screws passing through the shoe and inpaning the edge of the file.

ALL PARTS INTERCHANGEABLE.

EVERY TOOL GUARANTEED.

The Sterling Wrench Co.

ROCKFORD, ILL.